

150 KVA DIESEL GENERATOR

FEATURES & BENEFITS

- Maximum 165 kVA, 380V, 1500 RPM
- Constant voltage AVR (Automatic Voltage Regulator)
- 24 Volt Electric Starter
- 280 Litre Fuel Tank, 10 Hours @ 75% load
- Silent Version (± 72 dBA)
- Six cylinder, Turbo-Charged, water cooled diesel engine
- Three Phase Output
- DeepSea DSE6120 Digital Control Panel
- Low oil pressure system
- Low water cut out engine protection



| GENERAL DATA | |
|--------------------------------|-------------|
| Model: | BPD150S3-C |
| Prime Power (P.R.P): | 150 kVA |
| Stand-by Power (L.T.P): | 165 kVA |
| Amps: | 250 A |
| Power Factor / COS: | 0.8 |
| Frequency: | 50 Hz |
| Voltage: | 380 V |
| Phases: | Three Phase |
| Engine Speed: | 1500 RPM |
| Length: | 3100 mm |
| Width: | 1090 mm |
| Height: | 1950 mm |
| Weight: | 2010 kg's |
| Tank Capacity: | 280 l |

| ADDITIONAL | |
|--------------------------------|----------------------|
| Running Time: | 10 Hours @ 75% load |
| Structure Type: | Silent |
| Noise Level (7m): | 72 dBA |
| Auto Voltage Regulator: | Constant voltage AVR |
| ISO9001 Certified: | Yes |
| CE Certified: | Yes |
| Fuel Cons. @ 100% Load: | 34 |
| Fuel Cons. @ 75% Load: | 26 |
| Fuel Cons. @ 50% Load: | 17 |

| ENGINE DATA | |
|------------------------------|---|
| Brand: | Cummins |
| Model: | 6BTAA5.9-G12 |
| Type: | Six cylinder, Turbo-Charged, water cooled diesel engine |
| Starting System: | 24 Volt Electric Starter |
| Auto-Decompression: | Yes |
| Cubic Capacity (l): | 5.9 |
| Compression Ratio: | 17.3:1 |
| Rated Power (kW/RPM): | 155 / 1500 |
| Fuel Type: | Diesel |
| Lube Oil: | 15W40 |
| Low Pressure Alert: | Yes |
| Low Fuel Cut Out: | Yes |

| CONTROL PANEL | |
|-----------------------------|-----------------------|
| Model: | DeepSea DSE6120 |
| Type: | Digital Control Panel |
| Analogue Inputs: | 6 |
| Mains Phase Voltage: | Yes |
| Mains Line Voltage: | Yes |

| ALTERNATOR | |
|-------------------------|-----------------|
| Model: | LA274G120 |
| Pole Number: | 4 |
| Excitation Mode: | Self Excitation |

Johannesburg
011 397 7373

Pietermaritzburg
033 007 0812

Nelspruit
013 007 1753

Bloemfontein
051 001 1429

Dongfeng Cummins Technical Operations



ENGINE MODEL: 6BTAA5.9-G12
CURVE & DATASHEET: FR94438



Industrial Engine Performance Data
DONGFENG CUMMINS ENGINE Co.,LTD
 Xiangfan, Hubei Province, China
<http://www.dcec.com.cn>

Basic Engine Model:
6BTAA5.9-G12
FR94438

140kW@1500rpm
150kW@1800rpm

| | | |
|----------------------|-----------------|------------------|
| Configuration | CPL Code | Revision |
| D403076GX03 | 4283 | 2014/5/20 |


| | |
|----------------------------------|---|
| Compression Ratio: 17.3:1 | Aspiration: Turbocharged & Charge Air Cooled |
| Bore: 102 mm | Displacement: 5.9 L |
| Stroke: 120 mm | No. of Cylinders: 6 |
| Emission Certification: | Fuel System: BYC P7100/Electronic Governor |
| Governor Regulation: ≤5% | |

All data is based on the engine operating with fuel system, water pump, and 14.85 in H₂O (3.7 kPa) inlet air restriction , and with 2.95 in Hg (10 kPa) exhaust restriction ; not included are alternator,fan, optional equipment and driven components.

| Engine Speed | Standby Power | | Prime Power | | Continuous Power | |
|--------------|---------------|-----|-------------|-----|------------------|----|
| | RPM | kW | HP | kW | HP | kW |
| 1500 | 155 | 207 | 140 | 187 | | |
| 1800 | 165 | 220 | 150 | 200 | | |


Engine Performance Data @ 1500RPM

| OUTPUT POWER | | | FUEL CONSUMPTION | |
|-------------------------|-----|-----|------------------|-----|
| % | kW | HP | g/kW.h | L/h |
| STANDBY POWER | | | | |
| 100 | 155 | 207 | 204 | 38 |
| PRIME POWER | | | | |
| 100 | 140 | 187 | 203 | 34 |
| 75 | 105 | 140 | 202 | 26 |
| 50 | 70 | 93 | 207 | 17 |
| 25 | 35 | 47 | 231 | 10 |
| CONTINUOUS POWER | | | | |
| | | | | |

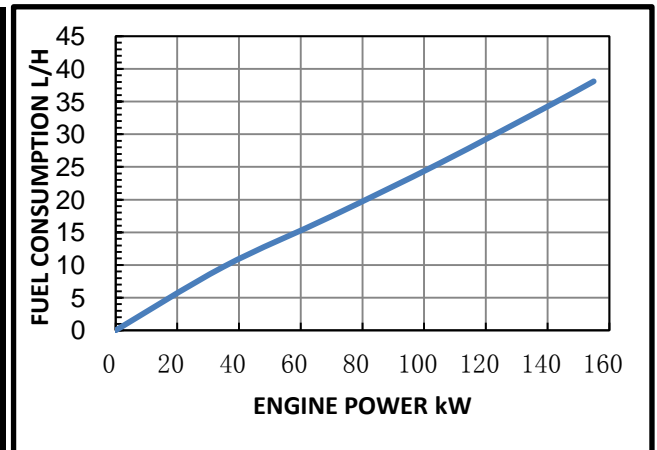

Engine Performance Data @ 1800RPM

| OUTPUT POWER | | | FUEL CONSUMPTION | |
|-------------------------|-------|-----|------------------|-----|
| % | kW | HP | g/kW.h | L/h |
| STANDBY POWER | | | | |
| 100 | 165 | 220 | 211 | 42 |
| PRIME POWER | | | | |
| 100 | 150 | 200 | 208 | 38 |
| 75 | 112.5 | 150 | 205 | 28 |
| 50 | 75 | 100 | 214 | 19 |
| 25 | 37.5 | 50 | 246 | 11 |
| CONTINUOUS POWER | | | | |
| | | | | |

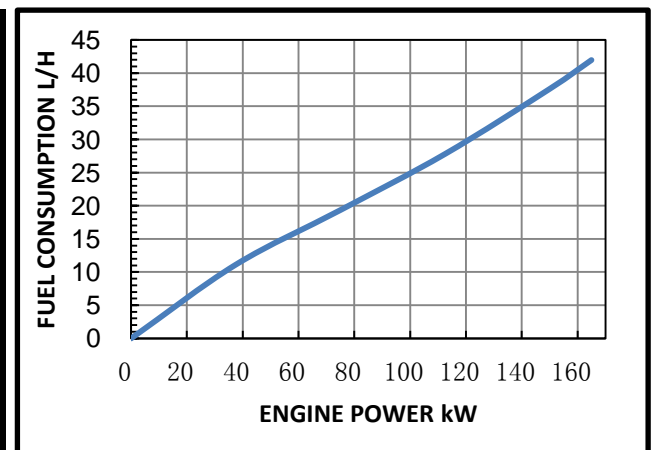

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with GB/T18297 conditions of 100kPa (29.53 in. Hg) barometric pressure , 25°C (77°F) inlet air temperature, and 1 kPa (0.30 in. Hg) water vapor pressure with No.0 diesel fuel. The engine may be operated without changing the fuel setting up to 1600 m (5250ft.) altitude.

POWER RATING APPLICATION GUIDELINES FOR GENERATOR DRIVE ENGINES

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. Generator drive engines are not designed for and shall not be used in variable speed D.C. generator set applications.

STANDBY POWER RATING is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Standby Power rating.

This rating should be applied where reliable utility power is available. A standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

CONTINUOUS POWER RATING is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

PRIME POWER RATING is applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

UNLIMITED TIME RUNNING PRIME POWER

Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours.

The total operating time at 100% Prime Power shall not exceed 500 hours per year.

A 10% overload capability is available for a period of 1 hour within a 12 hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

LIMITED TIME RUNNING PRIME POWER

Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating.

Above Source From CUMMINS AEB 26.02

GENERAL ENGINE DATA

| | | |
|--|--------------------|------|
| Approximate Engine Weight (dry)..... | -kg | 413 |
| Mass Moment of Inertia of Rotating Components (No Flywheel)..... | -kg·m ² | 0.25 |
| Center of Gravity from Front Face of Block..... | -mm | 391 |
| Center of Gravity above Crankshaft Centerline..... | -mm | 140 |

ENGINE MOUNTING

| | | |
|--|--------------------|------|
| Maximum (Static) Bending Moment at Front Support Mounting Surface..... | -N.m | 435 |
| Maximum (Static) Bending Moment at Side Pad Mounting Surface..... | -N.m | TBD |
| Maximum (Static) Bending Moment at Rear Face of Block..... | -N.m | 1356 |
| Moment of Inertia of Complete Engine | | |
| — Roll Axis..... | -kg·m ² | 14.8 |
| — Pitch Axis..... | -kg·m ² | 36.9 |
| — Yaw Axis..... | -kg·m ² | 31.9 |

EXHAUST SYSTEM

| | | |
|--|---------|------|
| Maximum Back Pressure..... | -kPa | 10 |
| Exhaust Pipe Size Normally Acceptable..... | -mm | 75 |
| Maximum Static Supported Weight at the Turbocharger Outlet Flange..... | -N.m | 13.5 |
| Exhaust Manifold Insulation Acceptable..... | -Yes/No | No |
| Turbocharger Insulation Acceptable..... | -Yes/No | No |

CHARGE AIR COOLING SYSTEM

| | | |
|--|------|----|
| Maximum allowable pressure drop across charge air cooler and OEM CAC piping (IMPD):..... | -kPa | 13 |
| Maximum Intake Manifold Temperature Differential (Ambient to IMT) (IMTD)..... | -°C | 25 |
| Intake manifold temperature for Fan-ON..... | -°C | 50 |
| Intake manifold air temperature derate/alarm temperature..... | -°C | 58 |

AIR INTAKE SYSTEM

| | | |
|---|--------|-----|
| Maximum Intake Air Restriction with Heavy Duty Air Cleaner | | |
| — Clean Element..... | -kPa | 3.7 |
| — Dirty Element..... | -kPa | 6.2 |
| Minimum Dirt Holding Capacity with Heavy Duty Air Cleaner..... | -g/cfm | 53 |
| Maximum Temperature Rise from Ambient to the Inlet of the Turbocharger..... | -°C | 17 |
| Recommended intake piping size (inner diameter)..... | -mm | 76 |

LUBRICATION SYSTEM

| | | |
|--|--------|-----------|
| Normal Operating Oil Pressure Range | | |
| — minimum low idle..... | -kPa | 207 |
| — maximum rated speed..... | -kPa | 345 |
| Maximum Oil Temperature | -°C | 121 |
| Oil Capacity with OP 9006 Oil Pan:High-Low..... | -litre | 14.2-12.3 |
| Minimum Required Lube System Capacity - Sump plus Filters..... | -litre | 16.4 |
| Angularity of Standard Oil Pan: (Values stated are for intermittent operation only): | | |
| — Front Down..... | - ° | 40 |
| — Front Up..... | - ° | 40 |
| — Side to Side..... | - ° | 40 |

FUEL SYSTEM

| | | |
|---|-----------|-----------|
| Type Injection System..... | | BYC P7100 |
| Maximum Restriction at Lift Pump..... | -kPa | 13.6 |
| Maximum Restriction at the Supply Side of the injector..... | -kPa | 67.7 |
| Total Drain Flow(constant for all loads)..... | -litre/hr | 30 |

COOLING SYSTEM

| | | |
|---|--------|---------|
| Coolant Capacity-Engine Only..... | -litre | 10 |
| Maximum Coolant Friction Head External to Engine | | |
| -1800rpm..... | -kPa | 35 |
| -1500rpm..... | -kPa | 28 |
| Maximum Static Head of Coolant Above Engine Crank Centerline..... | -m | 14 |
| Standard Thermostat (Modulating) Range..... | -°C | 82-95 |
| Minimum Pressure Cap..... | -kPa | 69 |
| Maximum Top Tank Temperature for Standby/Prime Power..... | -°C | 104/100 |

ELECTRICAL SYSTEM

| | | |
|---|---------|-------|
| Cranking Motor (Heavy Duty,Positive Engagement)..... | -volt | 24V |
| Battery Charging System,Negative Ground..... | -ampere | 40 |
| Maximum Allowable Resistance of Cranking Circuit..... | -ohm | 0.002 |
| Minimum Recommended Battery Capacity | | |
| -Cold Soal @ 10°F (-12°C) and Above..... | -°F CCA | 400 |

EMISSIONS

Gaseous Emissions per GB 20891-2007,Rated Speed@1500:

| | |
|------------------------------------|---------|
| —Weight-Specific NOx..... | -g/kW.h |
| —Weight-Specific HC..... | -g/kW.h |
| —Weight-Specific CO..... | -g/kW.h |
| —Weight-Specific Particulates..... | -g/kW.h |

Gaseous Emissions per GB 20891-2007,Rated Speed@1800:

| | |
|------------------------------------|---------|
| —Weight-Specific NOx..... | -g/kW.h |
| —Weight-Specific HC..... | -g/kW.h |
| —Weight-Specific CO..... | -g/kW.h |
| —Weight-Specific Particulates..... | -g/kW.h |

Fuel Rating Option used for these Data: **FR94438**

| | |
|----------------------------------|-------------|
| Governed Engine Speed..... | -rpm |
| Engine Idle Speed..... | -rpm |
| Gross Engine Power Output..... | -kW |
| Piston Speed..... | -m/s |
| Friction Horsepower..... | -kW |
| Engine Water Flow to Engine..... | -litre/sec. |
| Intake Air Flow..... | -litre/sec. |
| Exhaust Gas Flow..... | -litre/sec. |
| Exhaust Gas Temperature | -°C |
| Radiated Heat to Ambient..... | -kW |
| Heat Rejection to Coolant..... | -kW |
| Heat Rejection to Exhaust..... | -kW |

| STANDBY POWER | | PRIME POWER | |
|---------------|---------|-------------|---------|
| 1800 | 1500 | 1800 | 1500 |
| 750-850 | 750-850 | 750-850 | 750-850 |
| 165 | 155 | 150 | 140 |
| 7.2 | 6 | 7.2 | 6 |
| 16.4 | 12.7 | 16.4 | 12.7 |
| 2.4 | 2.0 | 2.4 | 2 |
| 196 | 150 | 182 | 137 |
| 438 | 357 | 398 | 321 |
| 458 | 507 | 445 | 495 |
| 21 | 19 | 19 | 17 |
| 62 | 58 | 58 | 57 |
| 140 | 125 | 125 | 113 |

ALL DATA CERTIFIED WITHIN 5%

TBD = To Be Decided

N/A = Not Applicable

N.A. = Not Available

All data is subject to change without notice, sorry for inform.

DSE6110/20 MKII

AUTO START & AUTO MAINS FAILURE CONTROL MODULES

DSE6110 MKII



DSE6120 MKII



KEY FEATURES

- Large back-lit text display
- Multiple display languages
- Heated display option available
- DSENet® expansion compatible
- Data logging facility
- Fully configurable via PC using USB communication
- Front panel configuration
- Efficient power save mode
- 3 phase generator sensing
- 3 phase mains (utility) sensing (DSE6120 MKII only)
- Generator/load power monitoring (kW, kV A, kV Ar, pf)
- Accumulated power monitoring (kW h, kVA h, kVAr h)
- Generator/load current monitoring and protection
- Generator overload protection (kW)
- Breaker control via fascia buttons
- Fuel and start outputs, configurable when using CAN
- 4 configurable DC outputs
- 4 configurable analogue/digital inputs
- Support for 0 to 10 V &

- 4 to 20 mA oil pressure sensors
- 6 configurable digital inputs
- Configurable staged loading outputs
- CAN, MPU and alternator speed sensing in one variant
- 3 engine maintenance alarms
- Engine speed protection
- Engine hours counter
- Engine pre-heat
- Engine run-time scheduler
- Engine idle control for starting & stopping
- Fuel pump control
- Real time clock
- Battery voltage monitoring
- Start on low battery voltage
- Configurable remote start input
- 1 alternative configuration
- Comprehensive warning, electrical trip or shutdown protection upon fault condition
- LCD and LED alarm indication
- Customisable information screens
- Configurable event log (100)
- Tier 4 ECO engine support including exhaust fluids & filters

- J1939-75 instrumentation output, configurable CAN instrumentation and alarms
- Start on low battery
- Enhanced alarm functionality
- Low load alarm

KEY BENEFITS

- Automatically transfers between mains (utility) and generator (DSE6120 MKII only)
- Increased input and output expansion capability via DSENet®
- User-friendly set-up and button layout for ease of use
- Multiple parameters are monitored simultaneously which are clearly displayed on a large back-lit text display via multiple languages
- The module can be configured to suit a wide range of applications
- Uses DSE Configuration Suite PC Software for simplified configuration
- Licence-free PC software
- IP65 rating (with optional gasket) offers increased resistance to water ingress

SPECIFICATIONS

DC SUPPLY

CONTINUOUS VOLTAGE RATING
8 V to 35 V Continuous

CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

MAXIMUM OPERATING CURRENT
100 mA at 12 V, 105 mA at 24 V

MAXIMUM STANDBY CURRENT
60 mA at 12 V, 55 mA at 24 V

MAXIMUM SLEEP CURRENT
40 mA at 12 V, 35 mA at 24 V

GENERATOR & MAINS (UTILITY) VOLTAGE RANGE

15 V to 415 V AC (Ph to N)
26 V to 719 V AC (Ph to Ph)

FREQUENCY RANGE
3.5 Hz to 75 Hz

INPUTS

DIGITAL INPUTS A to F
Negative switching

ANALOGUE INPUT A

Configurable as:
Negative switching digital input
0 V to 10 V
4 mA to 20 mA
0 Ω to 240 Ω

ANALOGUE INPUTS B TO D

Configurable as:
Negative switching digital input
0 Ω to 480 Ω

OUTPUTS

OUTPUT A (FUEL)

10 A short term, 5 A continuous, at supply voltage

OUTPUT B (START)

10 A short term, 5 A continuous, at supply voltage

AUXILIARY OUTPUTS C, D, E & F

2 A DC at supply voltage

DIMENSIONS

OVERALL
216 mm x 158 mm x 43 mm
8.5" x 6.2" x 1.5"

PANEL CUT-OUT

184 mm x 137 mm
7.2" x 5.3"

MAXIMUM PANEL THICKNESS

8 mm
0.3"

STORAGE TEMPERATURE RANGE

-40 °C to +85 °C
-40 °F to +185 °F

OPERATING TEMPERATURE RANGE

NON HEATED DISPLAY VARIANT
-30°C to +70°C
-22 °F to +158 °F

HEATED DISPLAY VARIANT

-40 °C to +70 °C
-40 °F to +158 °F

OPTIONAL PARTS

| PART | PART NUMBER |
|-------------|-------------|
| IP65 Gasket | 020-521 |

RELATED MATERIALS

TITLE

DSE6110/20 MKII Installation Instructions
DSE6110/20 MKII Operator Manual
DSE6110/20 MKII Configuration Suite PC Manual

PART NO.

053-173
057-226
057-224

DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH
TELEPHONE +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303
EMAIL sales@deepseapl.com **WEBSITE** www.deepseapl.com

DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA
TELEPHONE +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708
EMAIL sales@deepseausa.com **WEBSITE** www.deepseausa.com

DSE6110/20 MKII

AUTO START & AUTO MAINS FAILURE CONTROL MODULES

The DSE6110 MKII Auto Start Control Module and the DSE6120 MKII Auto Mains (Utility) Failure Control Module are suitable for a wide variety of single gen-set applications.

Monitoring engine speed, oil pressure, coolant temperature, frequency, voltage, current, power and fuel level, the modules give comprehensive engine and alternator protection. This is indicated on a large back-lit LCD text display via an array of warning, electrical trip and shutdown alarms in multiple languages.

Electronic J1939 (CAN) and non-electronic MPU and alternator sensing engine support for diesel, gas and petrol engines all in one variant. With a number of flexible inputs, outputs and protections, the modules can be easily adapted to suit a wide range of applications.

Through USB Communication both modules can be configured using the DSE Configuration Suite PC Software or through the module's front panel editor.

Using the DSE Configuration Suite PC Software the controller is easy to use and configure which allows alteration of operating parameters, sequences, timers and alarms.

AVAILABLE VARIANTS

- 6110-03 Auto Start with real time clock
- 6120-03 Auto Mains Failure with real time clock

ENVIRONMENTAL TESTING STANDARDS

ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950
Safety of Information Technology Equipment, including Electrical Business Equipment

TEMPERATURE

BS EN 60068-2-1
Ab/Ae Cold Test -30 °C
BS EN 60068-2-2
Bb/Be Dry Heat +70 °C

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of three major axes
5 Hz to 8 Hz at +/-7.5 mm,
8 Hz to 500 Hz at 2 GN

HUMIDITY

BS EN 60068-2-30
Db Damp Heat Cyclic 20/55 °C at 95% RH 48 Hours
BS EN 60068-2-78
Cab Damp Heat Static 40 °C at 93% RH 48 Hours

SHOCK

BS EN 60068-2-27
Three shocks in each of three major axes
15 GN in 11 mS

DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

BS EN 60529
IP65 - Front of module when installed into the control panel with the optional sealing gasket.

COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF GEN-SET APPLICATIONS

