

## 8.0 KVA DIESEL LIGHTING TOWER - 1 PHASE

### FEATURES & BENEFITS

- Maximum 8.8 kVA, 230V, 1500 RPM
- Constant voltage AVR (Automatic Voltage Regulator)
- 12 Volt Electric Starter
- 36 Litre Fuel Tank, 20 Hours @ 75% load
- Lighting Tower Version
- 3 Cylinder, water cooled, four stroke
- Single Phase Output
- DeepSea L401 Lighting Tower Controller
- 4 x Stabilisers (Manual)
- Roadworthy trailer with spare wheel
- 4 x 1500W Metal Halide (600,000 Lumen)



GENERAL DATA	
<b>Model:</b>	BUD-LIGHT
<b>Prime Power (P.R.P):</b>	8.0 kVA
<b>Stand-by Power (L.T.P):</b>	8.8 kVA
<b>Amps:</b>	38 A
<b>Power Factor / COS:</b>	0.8
<b>Frequency:</b>	50 Hz
<b>Voltage:</b>	230 V
<b>Phases:</b>	Single Phase
<b>Engine Speed:</b>	1500 RPM
<b>Length:</b>	2287 mm
<b>Width:</b>	1280 mm
<b>Height (Mast down / up):</b>	2500 / 7500 mm
<b>Weight:</b>	1380 kg's
<b>Tank Capacity:</b>	36 l

ADDITIONAL	
<b>Running Time:</b>	20 Hours @ 75% load
<b>Structure Type:</b>	Lighting Tower
<b>Input Socket:</b>	1 x 32A 220V
<b>Output Socket:</b>	1 x 32A 220V
<b>Battery Charging:</b>	Input socket 220v
<b>Fire Extinguisher:</b>	Optional Extra
<b>Fuel Cons. @ 100% Load:</b>	2.30
<b>Fuel Cons. @ 75% Load:</b>	1.72
<b>Fuel Cons. @ 50% Load:</b>	1.20

#### Optional Extras

- Remote monitoring via DSEWebNet (DSE890)
- 9KG fire Extinguisher & Bracket,
- Earth Spike & Clamp with 1m Earth Cable,
- Wheel Chock (x4 per tower light)

ENGINE DATA	
<b>Brand:</b>	Bundu Power
<b>Model:</b>	385
<b>Type:</b>	3 Cylinder, Water cooled, four stroke
<b>Starting System:</b>	12 Volt Electric Starter
<b>Auto-Decompression:</b>	Yes
<b>Cubic Capacity (l):</b>	1.53
<b>Compression Ratio:</b>	18:1
<b>Rated Power (kW/RPM):</b>	12
<b>Fuel Type:</b>	Diesel
<b>Lube Oil:</b>	15W40
<b>Low Pressure Alert:</b>	Yes
<b>Low Fuel Cut Out:</b>	Yes

CONTROL PANEL	
<b>Model:</b>	DeepSea L401
<b>Type:</b>	Digital Control Panel
<b>Auto Mains Failure:</b>	Yes
<b>Scheduled Start/Stop:</b>	Up to 16
<b>Remote Monitoring:</b>	Optional

LIGHTS & MAST	
<b>Lights:</b>	4 x 1500W Metal Halide
<b>Mast:</b>	Telescopic, Manual 7m
<b>Mast Rotation:</b>	350°
<b>Illumination Area:</b>	3600 m <sup>2</sup>
<b>Total Lumen:</b>	600,000

Remote monitoring requires a valid 4G enabled SIM card or a LAN connection with Internet access. Coverage is dependent on a strong Internet connection.

**Johannesburg**  
011 397 7373

**Pietermaritzburg**  
033 007 0812

**Nelspruit**  
013 007 1753

**Bloemfontein**  
051 001 1429

# DSEL401 MKII

## INTELLIGENT LIGHTING TOWER CONTROL

### FEATURES



#### SUITABLE FOR A WIDE RANGE OF MOBILE LIGHTING APPLICATIONS

The DSEL401 MKII is a sophisticated control module designed specifically for mobile lighting tower applications such as events, road maintenance, emergency lighting etc.

Cleverly designed with ease-of-use in mind, the DSEL401 MKII controller provides an unrivalled level of flexible features which can be easily configured to suit a wide range of complex lighting sequences.

#### EFFICIENT SYSTEM MANAGEMENT

An eight-event scheduler is provided to operate up to a 4-stage load output to protect the generator from stalling on start-up, and to shut down lighting circuits in a chosen sequence, depending on fuel level, to maximise the run time of essential lighting. This ensures maximum fuel efficiency against optimum lighting levels. Each of the lighting circuits can also be inhibited individually using available inputs, ensuring that unnecessary light is not made available.

The built-in lighting circuit monitor in the DSEL401 MKII is able to detect and indicate light bulb failures to facilitate maintenance efficiencies.

Based on the same world-leading technology used in contemporary DSE controllers, the module is creatively engineered to fit into a compact case making it ideal for small panel designs.

Configurable via the front fascia or using the DSE Configuration Suite PC software, which is common to other DSE modules, the DSEL401 MKII can be configured to provide a comprehensive list of protection and monitoring functions.

### ENVIRONMENTAL TESTING STANDARDS

#### ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2  
EMC Generic Immunity Standard for the Industrial Environment  
BS EN 61000-6-4  
EMC Generic Emission Standard for the Industrial Environment

#### ELECTRICAL SAFETY

BS EN 60950  
Safety of Information Technology Equipment, including Electrical Business Equipment

#### TEMPERATURE

BS EN 60068-2-1  
Ab/Ae Cold Test -30 °C  
BS EN 60068-2-2  
Bb/Be Dry Heat +70 °C

#### VIBRATION

BS EN 60068-2-6  
Ten sweeps in each of three major axes  
5 Hz to 8 Hz at +/-7.5 mm,  
8 Hz to 500 Hz at 2 GN

#### HUMIDITY

BS EN 60068-2-30  
Db Damp Heat Cyclic 20/55 °C at 95% RH 48 Hours  
BS EN 60068-2-78  
Cab Damp Heat Static 40 °C at 93% RH 48 Hours


#### SHOCK

BS EN 60068-2-27  
Three shocks in each of three major axes  
15 GN in 11 mS

#### DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

BS EN 60529  
IP65 - Front of module when installed into the control panel with the optional sealing gasket.

## COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF LIGHTING TOWER APPLICATIONS

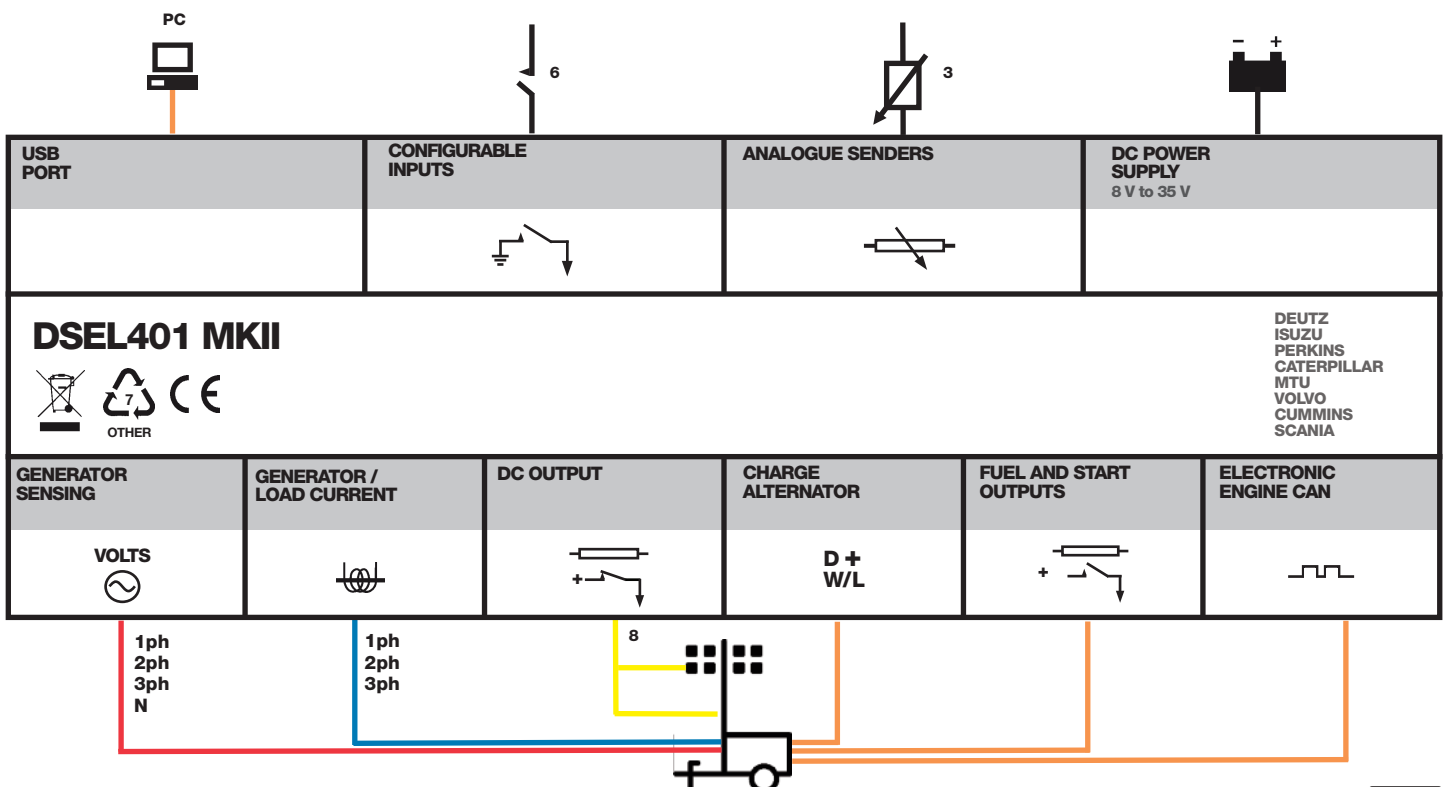

# DSEL401 MKII

## INTELLIGENT LIGHTING TOWER CONTROL

### FEATURES



### KEY BENEFITS

- Ultimate size to feature ratio
- High number of inputs & outputs ensure module flexibility
- Hours counter provides accurate information for monitoring and maintenance periods
- User-friendly set-up and button layout for ease of use
- Multiple parameters are monitored simultaneously which are clearly displayed on the largest back-lit icon display in its class
- The module can be configured to suit a wide range of lighting tower applications
- Compatible with a wide range of CAN engines, including Tier 4 engine support
- Uses DSE Configuration Suite PC Software for simplified configuration
- Licence-free PC software
- Fuel monitoring provides the ability to turn off lights as the fuel level drops which can enable longer running hours.

- IP65 rating (with optional gasket) offers increased resistance to water ingress

### KEY FEATURES

- Largest back-lit icon display in its class
- Heated display option available
- Lighting tower mast and holding support control
- Automatic & manual light control
- Automatic light sequencing
- Individual lighting control
- Configurable light re-strike timer
- Fully configurable via the fascia or PC using USB communication
- Extremely efficient power save mode
- 3 phase generator sensing
- Generator/load power monitoring (kW, kV A, kV Ar, pf)
- Generator/load current monitoring and protection
- Light failure detection
- Compatible with 600 V Ph to Ph nominal systems
- Fuel and crank outputs, configurable when using CAN
- 8 configurable DC outputs
- 3 configurable analogue/digital inputs
- 6 configurable digital inputs
- Configurable staged light control outputs
- CAN and alternator speed sensing in one variant
- 3 engine maintenance alarms
- 8 event scheduler
- Engine speed protection
- Engine hours counter
- Engine pre-heat
- Engine run-time scheduler
- Battery voltage monitoring
- Start on low battery voltage
- Low fuel shutdown
- Configurable remote start input
- 1 alternative configuration
- Comprehensive warning, electrical trip or shutdown protection upon fault condition
- LCD alarm indication
- Event log (50)

### RELATED MATERIALS

TITLE	PART NO'S
DSEL401 MKII Installation Instructions	053-172
DSEL401 MKII Operator Manual	057-221
DSEL401 MKII Configuration Suite PC Manual	057-222

### PART NO'S

053-172  
057-221  
057-222

### SPECIFICATION

#### DC SUPPLY

**CONTINUOUS VOLTAGE RATING**  
8 V to 35 V Continuous

#### CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

#### MAXIMUM OPERATING CURRENT

85 mA at 12 V, 96 mA at 24 V

#### MAXIMUM STANDBY CURRENT

51 mA at 12 V, 47 mA at 24 V

#### MAXIMUM SLEEP CURRENT

35 mA at 12 V, 32 mA at 24 V

#### MAXIMUM DEEP SLEEP CURRENT

<10 uA at 12 V, <10 uA at 24 V

#### OUTPUTS

##### OUTPUT A (FUEL)

10 A short term, 5 A continuous, at supply voltage

##### OUTPUT B (START)

10 A short term, 5 A continuous, at supply voltage

##### AUXILIARY OUTPUTS C to J

2 A DC at supply voltage

#### GENERATOR

##### VOLTAGE RANGE

15 V to 415 V AC (Ph to N)  
26 V to 719 V AC (Ph to Ph)

##### FREQUENCY RANGE

3.5 Hz to 75 Hz

#### DIMENSIONS

##### OVERALL

140 mm x 113 mm x 43 mm  
5.5" x 4.4" x 1.7"

##### PANEL CUT-OUT

118 mm x 92 mm  
4.6" x 3.6"

##### MAXIMUM PANEL THICKNESS

8 mm  
0.3"

#### STORAGE TEMPERATURE RANGE

-40 °C to +85 °C  
-40 °F to +185 °F

#### OPERATING TEMPERATURE RANGE

##### NON HEATED DISPLAY VARIANT

-30 °C to +70 °C  
-22 °F to +158 °F

##### HEATED DISPLAY VARIANT

-40 °C to +70 °C  
-40 °F to +158 °F

### OPTIONAL PARTS

PART	PART NUMBER
IP65 Gasket	020-282

### DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH  
**TELEPHONE** +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303  
**EMAIL** sales@deepseapl.com **WEBSITE** www.deepseapl.com

### DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA  
**TELEPHONE** +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708  
**EMAIL** sales@deepseausa.com **WEBSITE** www.deepseausa.com